






24" High Thrift Air "T296" Slant Canopy

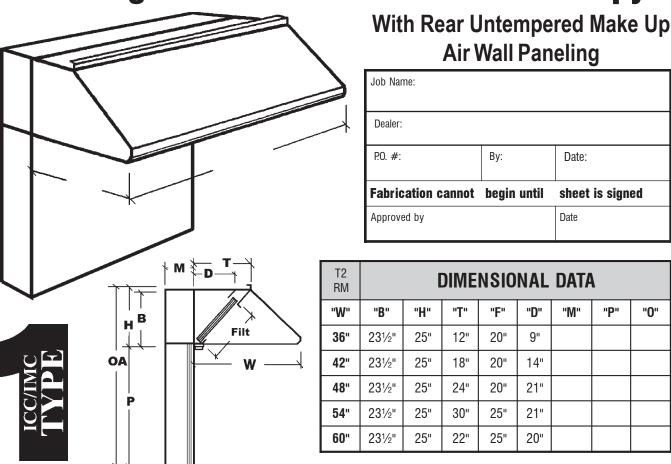

specifications
T296S0 Series Thrift Air Exhaust Canopy: Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction. Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and
• removable Grease Cup. Middle and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96, and Interna-
tional Mechanical Code Type I Hood Standards.
• Rear Make Up Air Plenum: Distributes untempered air behind the canopy in an insulated rear make up air plenum.
↑ T296A8 Series Thrift Air Exhaust Canopy: Same only all 18 Gauge Aluminized Steel Painted Gray where exposed.
Vapor Proof Canopy Light: Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incan-
descent vapor and Grease proof Canopy Light. Included Flastic Coated Linic Glass Globe, Canopy
• Light Fixture, Mounting Plate, External Junction Box, not prewired.
UL 710 and Canada CSA C22.2 No 113. Canopy Labeled and Listed UL 710 UL 710 Canopy Labeled and Listed UL 710 Canopy Labeled and Listed UL 710 Canopy Labeled and Listed