






24" High Thrift Air "T296" Slant Canopy

With Rear Untempered Make Up Air Wall Paneling
With End Curtains

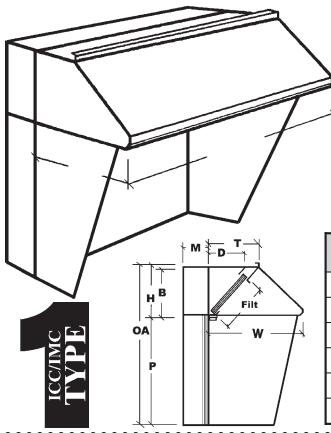

Job Name:		
Dealer:		
Canopy Model	Ву:	Date:
Fabrication cannot	begin until	sheet is signed
Approved by	PO Number	Date

T2 RM	DIMENSIONAL DATA								
"W"	"B"	"H"	"T"	"F"	"D"	"M"	"P"	"0"	
36"	231/2"	25"	12"	20"	9"				
42"	23½"	25"	18"	20"	14"				
48"	23½"	25"	24"	20"	21"				
54"	23½"	25"	30"	25"	21"				
60"	231/2"	25"	22"	25"	20"	·			

Specifications

	T296S0 Series Thrift Air Exhaust Canopy: Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish or
Γ	all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction.
	Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and
L	removable Grease Cup. Middle and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96, and Interna-
	tional Mechanical Code Type I Hood Standards.

End Curtains: Light Gauge S/S End Curtains to improve efficiency and lower required CFM

Rear Make Up Air Plenum: Distributes untempered air behind the canopy in an insulated rear make up air plenum.

T296A8 Series Thrift Air Exhaust Canopy: Same only all 18 Gauge Aluminized Steel Painted Gray where exposed.

Vapor Proof Canopy Light: Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy

Light Fixture, Mounting Plate, External Junction Box, not prewired.

UL 710 and Canada CSA C22.2 No 113.

Canopy Labeled and Listed

UL 710





Can/CSA C22.2