



CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS



NFPA#96

APPROVAL


SHEET



Standard 2

# 24" Thrift Air "T2B96" Box Style Canopy

With End Curtains  
With 3" NFPA Air Space

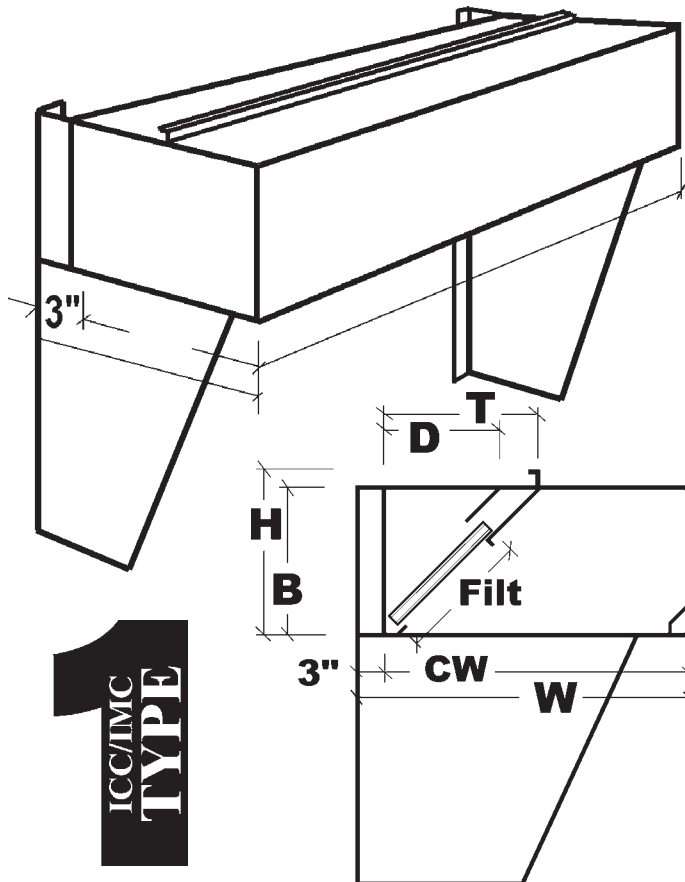

1  
ICC/IMC  
TYPE

Job Name:		
Dealer:		
Canopy Model	By:	Date:
<b>Fabrication cannot begin until sheet is signed</b>		
Approved by	PO Number	Date

T2B AS	DIMENSIONAL DATA					
"W"	"CW"	"B"	"H"	"T"	"Filt"	"D"
39"	36"	23½"	25"	26"	20"	20"
45"	42"	23½"	25"	21"	20"	18"
51"	48"	23½"	25"	26"	20"	23"
57"	54"	23½"	25"	32"	25"	28"
63"	60"	23½"	25"	32"	25"	28"

## Specifications

☐ **T2B96S0 Series Thrift Air Box Style Exhaust Canopy:** Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction. Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and removable Grease Cup. Front and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96 and International Mechanical Code Type I Hood Standards.

**Air Space:** 3" Wide Air Space, on back and bottom of hood, so that the canopy can be hung on fire rated drywall on steel studs and meet NFPA #96

**End Curtains:** Light Gauge S/S End Curtains to improve efficiency and lower required CFM

☐ **T2B96A8 Series Thrift Air Box Style Exhaust Canopy:** Sturdi-Bilt Canopy same as above only constructed of 18 Gauge Aluminized Steel. All Exposed surfaces painted hammertone Gray.

☐ **Vapor Proof Canopy Light:** Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy Light Fixture, Mounting Plate, External Junction Box, not prewired.

☐ **UL 710 and Canada CSA C22.2 No 113.**  
Canopy Labeled and Listed

UL 710



Can/CSA C22.2

