




APPROVAL SHEET



Thrift Air "TB96" Box Style Canopy

WithExhaust Plenum, 3" NFPA Air Space, End Curtains

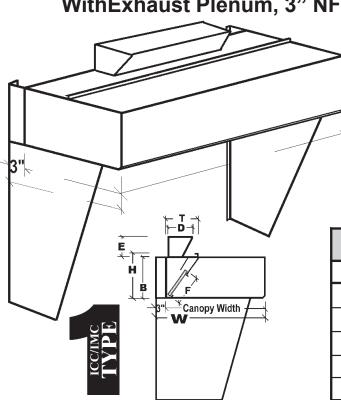

Job Name:		
Dealer:		
Canopy Model	Ву:	Date:
Fabrication cannot	begin until	sheet is signed
Approved by	PO Number	Date

Exit Duct Size:

	X	
ГΛ		

TBAS ECPLN	DIMENSIONAL DATA						
"W"	"CW"	"B"	"H"	"T"	"F"	"D"	"E"
39"	36	161/2"	18"	19"	16"		
45"	42	161/2"	18"	25"	16"		
51"	48	16½"	18"	19"	16"		
57"	54	161/2"	18"	25"	16"		
63"	60	161/2"	18"	30"	16"		

Specification:	5
----------------	---

	TB96S0 Series Thrift Air Box Style Exhaust Canopy: Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel
ŧ	‡3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construc-
t	ion. Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain
а	and removable Grease Cup. Front Middle and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA, and
I	nternational Mechanical Code Type I Hood Standards.

Exhaust Plenum: Externally welded NFPA#96 16 Gauge Aluminized Steel Plenm with two welded canopy connections • which allows one exhaust duct to serve hood.

• Air Space: NFPA 3" Air Space on (back) (left) (right) for use on fire rated drywall on steel stud walls

End Curtains: Light Gauge S/S End Curtains to improve efficiency and lower required CFM

TB96A8 Series Thrift Air Box Style Exhaust Canopy: Sturdi-Bilt Canopy same as above only constructed of 18 • Gauge Aluminized Steel. All Exposed surfaces painted hammertone Gray.

Vapor Proof Canopy Light: Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy • Light Fixture, Mounting Plate, External Junction Box, not prewired.

UL 710 & CSA C22.2 No 113. UL 710

Canopy Labeled and Listed





Can/CSA C22.2