



CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS



NFPA#96




APPROVAL
SHEET



Standard 2

Thrift Air "T96" Slant Canopy

With End Curtains
With 3" NFPA Air Space

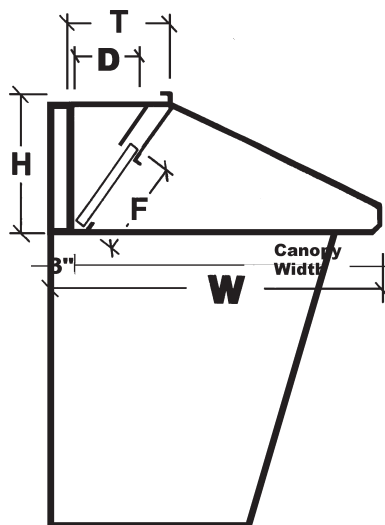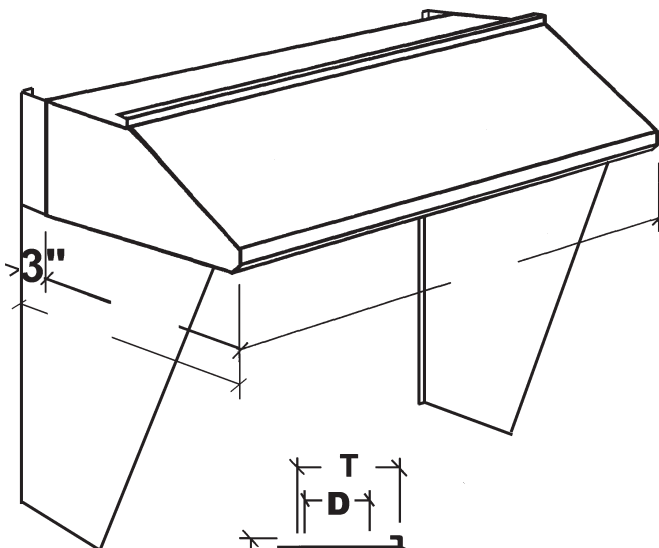

Job Name:		
Dealer:		
Canopy Model	By:	Date:
Fabrication cannot begin until sheet is signed		
Approved by	PO Number	Date

TAS	DIMENSIONAL DATA					
"W"	"CW"	"B"	"H"	"T"	"F"	"D"
39"	36"	16½"	18"	14"	16"	10"
45"	42"	16½"	18"	14"	16"	10"
51"	48"	16½"	18"	20"	16"	12"
57"	54"	16½"	18"	20"	16"	12"
63"	60"	16½"	18"	20"	16"	12"

Specifications

- ☐ **T96S0 Series Thrift Air Exhaust Canopy:** Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction. Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and removable Grease Cup. Back and Middle Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96 and International Mechanical Code Type I Hood Standards.
- ☐ **Air Space:** 3" NFPA Air Space at Rear of Canopy for 3" clearance to limited combustible material, same material as hood.
- ☐ **End Curtains:** Light Gauge S/S End Curtains to improve efficiency and lower required CFM
- ☐ **T96A8 Series Thrift Air Exhaust Canopy:** Same only all 18 Gauge Aluminized Steel Painted Gray where exposed.
- ☐ **S/S Wall Paneling:** 20 Gauge S/S Wall Paneling with Aluminum Trim. _____" Hi
- ☐ **Vapor Proof Canopy Light:** Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass
- ☐ **Globe, Canopy Light Fixture, Mounting Plate, External Junction Box, not prewired.**
- ☐ **UL 710** Canopy Labeled and Listed.
- ☐ **S/S Wall Paneling:** Model W S 20 Gauge Polished S/S, _____" High, with End and Divider Trim Strips



EXHAUST HOOD WITHOUT EXHAUST DAMPER

