




With End Curtains



NOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS


## **Thrift Air "T96" Slant Canopy**

With Rear Untempered Make Up Air Wall Paneling

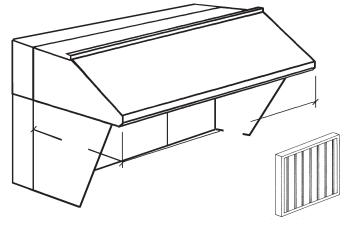

Job Name:		
Dealer:		
Canopy Model	Ву:	Date:
Fabrication cannot	begin until	sheet is signed
Approved by	PO Number	Date

T RM	DIMENSIONAL DATA							
"W"	"B"	"H"	"T"	"F"	"D"	"M"	"P"	"0"
36"	16½"	18"	14"	16"	10"			
42"	161/2"	18"	14"	16"	10"			
48"	16½"	18"	20"	16"	12"			
54"	16½"	18"	20"	16"	12"			
60"	16½"	18"	20"	16"	12"			



ICC/IMC	TYPE

Specifications
<b>T96S0</b> Series Thrift Air Exhaust Canopy: Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish
on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction.
Includes a full compliment of 20" wide U.L. Listed Heavy Duty Galvanized Steel Baffle Filters, Pitched Rear Grease Gutter,
Grease Drain and removable Grease Cup. Front and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96.
and International Mechanical Code Type I Standards.
Rear Make Up Air Plenum: Distributes untempered air behind the canopy in an insulated rear make up air plenum.
• End Curtains: Light Gauge S/S End Curtains to improve efficiency and lower required CFM
<b>T96A8</b> Series <b>Thrift Air Exhaust Canopy:</b> Same only all 18 Gauge Aluminized Steel Painted Gray where exposed.
S/S Wall Paneling: 20 Gauge S/S Wall Paneling with Aluminum Trim" Hi
Vapor Proof Canopy Light: Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incan-
descent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy
Light Fixture, Mounting Plate, External Junction Box, not prewired.
UL 710
Canopy Labeled and Listed UL / IU  EXHAUST DAMPER  EXHAUST DAMPER