






Thrift Air "TL96" Low Ceiling Canopy

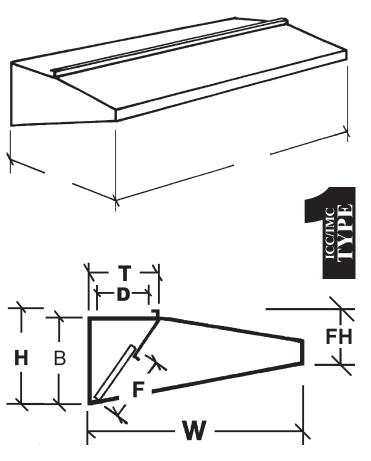

Job Name:		
Dealer:		
Canopy Model	Ву:	Date:
Fabrication cannot	begin until	sheet is signed
Approved by	PO Number	Date

TL	DIMENSIONAL DATA						
"W"	"B"	"H"	"T"	"F"	"FH"	"D"	
36"	16"	171/2"	15"	16"	9"	10"	
42"	16"	171/2"	15"	16"	9"	10"	
48"	16"	171/2"	20"	16"	9"	12"	
54"	16"	171/2"	27"	16"	9"	13"	
60"	16"	171/2"	20"	16"	9"	12"	

Specifications
TL96S0 Series Thrift Air Low Ceiling Exhaust Canopy: Sturdi-Bilt Canopy constructed of 20 Gauge Stainless
• Steel #3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. Designed for Kitchens with low ceilings,
only 7ft3" to top of canopy after hanging at 6ft6". All Externally Welded Seams, Code #96 Construction. Includes a full
• compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and removable
• Grease Cup. Front and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96 and International Mechani-
cal Code Type I Hood Standards.
• TL9A8 Series Thrift Air Low Ceiling Exhaust Canopy: Sturdi-Bilt Canopy same as above only constructed of 18
Gauge Aluminized Steel. All Exposed surfaces painted hammertone Gray.
S/S Wall Paneling: 20 Gauge S/S Wall Paneling with Aluminum Trim" Hi
Vapor Proof Canopy Light: Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incandescent Vapor and Grease proof Canopy Light Included Plastic Coated Lime Glass Globe
Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe,
Canopy Light Fixture, Mounting Plate, External Junction Box, not prewired.