



CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS




**APPROVAL
SHEET**



Standard 2


Thrift Air "TL96" Low Ceiling Canopy

With Rear Tempered Make Up
Air Wall Paneling

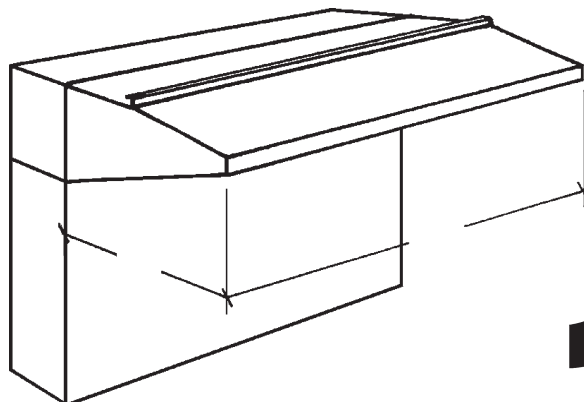

**1
ICC/IMC
TYPE**

Job Name:		
Dealer:		
Canopy Model	By:	Date:
Fabrication cannot begin until sheet is signed		
Approved by	PO Number	Date

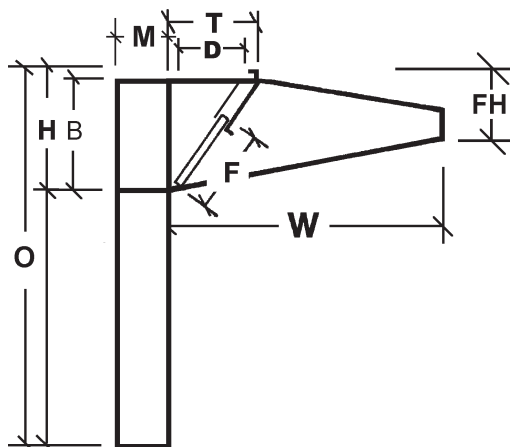

TL RM	DIMENSIONAL DATA								
"W"	"B"	"H"	"T"	"F"	"FH"	"D"	"M"	"P"	"O"
36"	16"	17½"	15"	16"	9"	10"			
42"	16"	17½"	15"	16"	9"	10"			
48"	16"	17½"	20"	16"	9"	12"			
54"	16"	17½"	27"	16"	9"	13"			
60"	16"	17½"	20"	16"	9"	12"			

Specifications

☐ **TL96S0 Series Thrift Air Low Ceiling Exhaust Canopy:** Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. Designed for Kitchens with low ceilings, only 7ft3" to top of canopy after hanging at 6ft6". All Externally Welded Seams, Code #96 Construction. Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and removable Grease Cup. Front and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96 and International Mechanical Code Type I Hood Standards.

Rear Make Up Air Plenum: Distributes Tempered air behind the canopy in an rear make up air plenum.

☐ **TL9A8 Series Thrift Air Low Ceiling Exhaust Canopy:** Sturdi-Bilt Canopy same as above only constructed of 18 Gauge Aluminized Steel. All Exposed surfaces painted hammertone Gray.

☐ **S/S Wall Paneling:** 20 Gauge S/S Wall Paneling with Aluminum Trim. _____" Hi

☐ **Sturdi-Bilt Fireguard Canopy Light,** U.L. and NSF Listed 100 Watt Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy Light Fixture, Mounting Plate, External Junction Box, not prewired.



8400 Puritan Avenue, Detroit, Michigan, 48238 - Phone Toll Free - 1-800-521-2895 - Fax Toll Free 1-800-444-2895