



CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS




APPROVAL  
SHEET



Standard 2


# Thrift Air "TL96" Low Ceiling Canopy

With Rear Untempered Make Up Air Wall Paneling  
With End Curtains

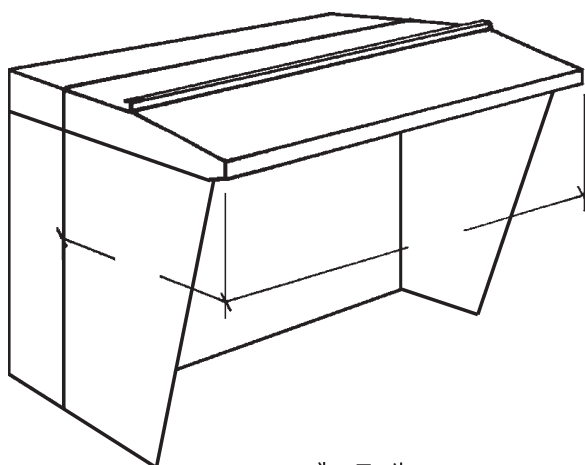

Job Name:		
Dealer:		
Canopy Model	By:	Date:
<b>Fabrication cannot begin until sheet is signed</b>		
Approved by	PO Number	Date

1  
ICC/MC  
TYPE

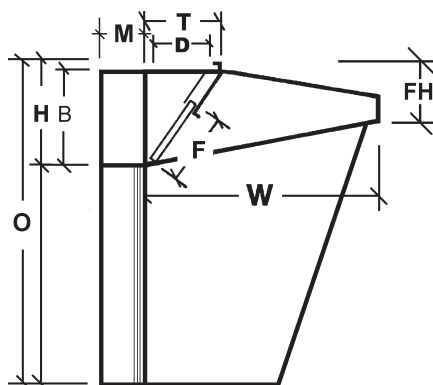

TL RM	DIMENSIONAL DATA								
"W"	"B"	"H"	"T"	"F"	"FH"	"D"	"M"	"P"	"O"
36"	16"	17½"	15"	16"	9"	10"			
42"	16"	17½"	15"	16"	9"	10"			
48"	16"	17½"	20"	16"	9"	12"			
54"	16"	17½"	27"	16"	9"	13"			
60"	16"	17½"	20"	16"	9"	12"			

## Specifications

- ☐ **TL96S0 Series Thrift Air Low Ceiling Exhaust Canopy:** Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. Designed for Kitchens with low ceilings, only 7ft3" to top of canopy after hanging at 6ft6". All Externally Welded Seams, Code #96 Construction. Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and removable Grease Cup. Front and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96 and, International Mechanical Code Type I Hood Standards.
- ☐ **Rear Make Up Air Plenum:** Distributes untempered air behind the canopy in an insulated rear make up air plenum.
- ☐ **End Curtains:** Light Gauge S/S End Curtains to improve efficiency and lower required CFM
- ☐ **TL9A8 Series Thrift Air Low Ceiling Exhaust Canopy:** Sturdi-Bilt Canopy same as above only constructed of 18 Gauge Aluminized Steel. All Exposed surfaces painted hammertone Gray.
- ☐ **S/S Wall Paneling:** 20 Gauge S/S Wall Paneling with Aluminum Trim. \_\_\_\_\_" Hi
- ☐ **Vapor Proof Canopy Light:** Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy Light Fixture, Mounting Plate, External Junction Box, not prewired.

