



Thrift Air "TLB96" Low Ceiling Box Canopy

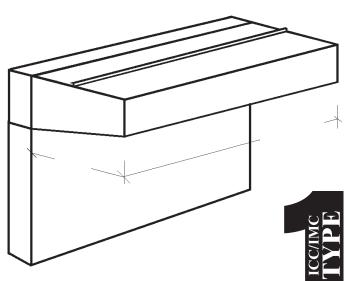

| Job Name: | | | |
|--------------------|-------------|-----------------|--|
| Dealer: | | | |
| Canopy Model | By: | Date: | |
| Fabrication cannot | begin until | sheet is signed | |
| Approved by | PO Number | Date | |

With Rear Untempered Make Up

Air Wall Paneling



| TL RM | | DIMENSIONAL DATA | | | | | | | |
|----------|-----|------------------|-----|--------|------|-----|-----|--------------|-----|
| "W" | "B" | "H" | "T" | "Filt" | "FH" | "D" | "M" | " P " | "0" |
| 36" | 16" | 17½" | 15" | 16" | 12" | 10" | | | |
| 42" | 16" | 17½" | 15" | 16" | 12" | 10" | | | |
| 48" | 16" | 17½" | 20" | 16" | 12" | 12" | | | |
| 54" | 16" | 17½" | 27" | 16" | 12" | 13" | | | |
| 60" | 16" | 17½" | 20" | 16" | 12" | 12" | | | |

Specifications

TLB96S0 Series Thrift Air Low Ceiling Exhaust Canopy: Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction. Includes a full compliment of 20" wide U.L. Listed Heavy Duty Galvanized Steel Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and removable Grease Cup. Front and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96, and International Mechanical Code Type I Standards.

Rear Make Up Air Plenum: Distributes untempered air behind the canopy in an insulated rear make up air plenum.
TLB96A8 Series Thrift Air Exhaust Canopy: Same only 18 Gauge Aluminized Steel Painted Gray where exposed.
S/S Wall Paneling: 20 Gauge S/S Wall Paneling with Aluminum Trim. ______" Hi

Vapor Proof Canopy Light: Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy Light Fixture, Mounting Plate, External Junction Box, not prewired.

8400 Puritan Avenue, Detroit, Michigan, 48238 - Phone Toll Free - 1-800-521-2895 - Fax Toll Free 1-800-444-2895