





CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS

# APPROVAL SHEET



## U. L. Air Listed WALL FANS

### Direct Drive

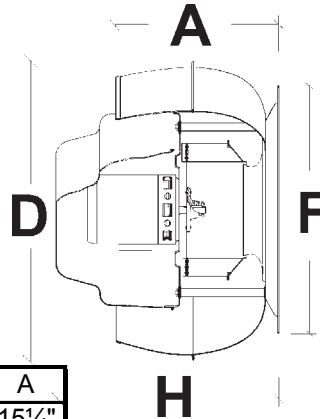

	D	F	H	A
FW-A	21"	21¼"	15¾"	15¼"
FW-B	21"	21¼"	15¾"	15¼"
FW-C	30¼"	25"	24¾"	18¾"
FW-D	30¼"	25"	25¼"	18¾"
FW-E	30¼"	25"	24¾"	18¾"

Job Name:		
Dealer:		
Model	SP	CFM
P.O. #:	By:	Date:
<b>Fabrication cannot begin until sheet is signed</b>		
Approved by		Date

Model	HP	RPM	CFM @								
			1/8"	¼"	3/8"	½"	5/8"	¾"	7/8"	1"	1¼"
FW-A	1/8	1550	615	533	456	384	264	166	-	-	-
FW-B	1/8	1550	727	641	554	450	371	240	-	-	-
FW-C	1/6	1075	1069	970	852	556	-	-	-	-	-
FW-D	1/6	1075	1550	1442	1323	1180	1180	-	-	-	-
FW-E	1/3	1725	1808	1749	1689	1629	1629	1499	1426	1343	1003

### Specifications

**Description:** Spun Aluminum Upblast Centrifugal Wall Mounted Exhaust Ventilator. **Certifications:** Underwriters Laboratories (UL705 - Power Ventilator) and ULc listed for Canada (Power Ventilation) AMCA Certified Ratings for Sound and Air Performance. **Construction:** Bolt and Welded Construction, Spun Marine Alloy Aluminum, quick release Latch Removal Top, External Wiring Compartment with Integral Conduit Chase to Motor Compartment, 14 gauge Steel Power Assembly, Rolled Bead on Windband, bolted to a rigid Aluminum support Structure. Weatherproof construction, drains water away from the wall. **Wheel:** 100% Aluminum Centrifugal Backward included, Balanced to AMCA Standard 204-96. **Motor:** Heavy Duty, Permanently Lubricated Sealed Ball Bearing. **Bearings:** Heavy Duty re-greasable Ball type Bearings in a Cast Iron Housing, minimum L50 life in excess of 200,000 hours. **Disconnect Switch:** NEMA 3R Exterior Rain Tight Covered Safety Disconnect Switch, Prewired.

**Option:** Two Speed Fan