




CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS


# APPROVAL SHEET



*Economy*

## 24" Wide Low Side Wall Hood


Rear Untempered Make Up Air

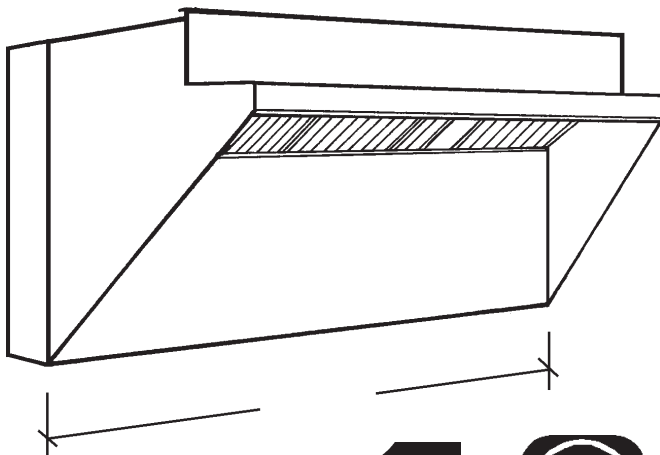

Standard 2

Job Name:		
Dealer:		
Updraft Model	By:	Date:
<b>Fabrication cannot begin until sheet is signed</b>		
Approved by	PO Number	Date

### Options

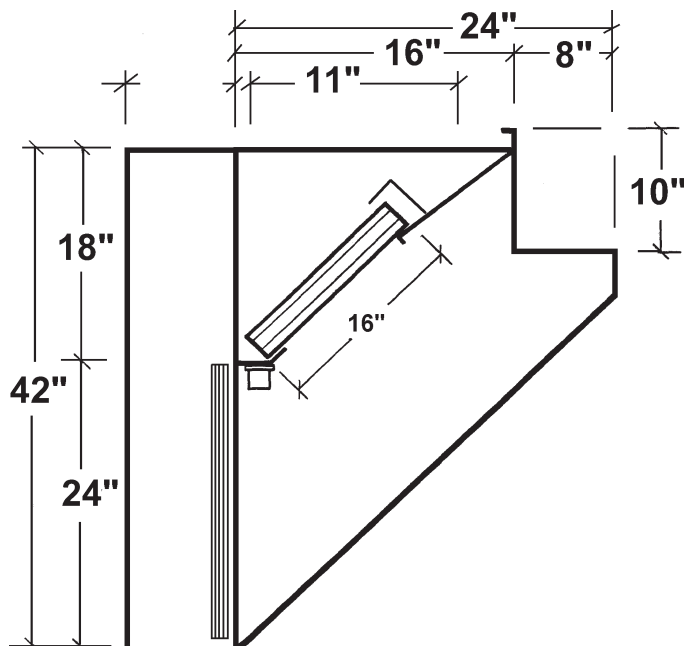

### Specifications

- **LSW73"S" Series:** 24" Wide Stainless Steel Model constructed of 20 gauge Stainless Steel where shows. Exhaust Section 18 gauge seamless Code #96 welded construction. Rear Air space insulated for untempered Make Up Air Discharge. 16" high Aluminum U.L. Listed Baffle Filters. Pitched grease trough to removable covered Stainless Steel grease cup. Complete with hangerstrap and instructions. NSF Listed, built to NFPA Code #96 and International Mechanical Code requirements for Type I Low Side Wall Hoods.
- **Make Up Air:** Untempered Make Up Air introduced behind Ventilator in insulated rear air distribution plenum.
- ☐ **LSW73"A" Series:** Painted Model: Same as above except exposed exterior constructed of 18 gauge Aluminized coated Steel, painted hammertone gray.