






30" Wide Low Side Wall Hood

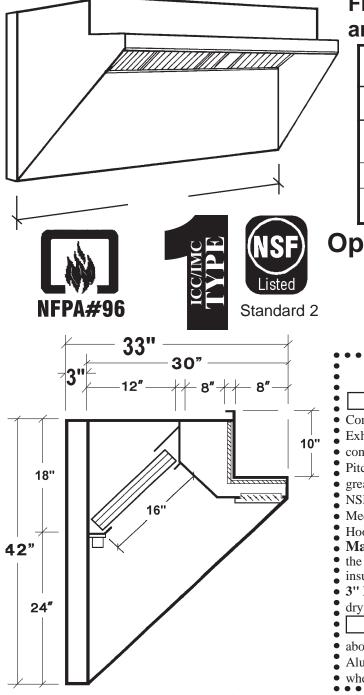

Front Untempered Make Up Air and 3" NFPA #96 Air Space

Job Name:		
Dealer:		
Updraft Model	By:	Date:
Fabrication cannot	begin until	sheet is signed
Approved by	PO Number	Date

Options

Specifications LSW96"S" Series: Stainless Steel Model: Constructed of 20 gauge Stainless Steel where shows. Exhaust Section 18 gauge seamless Code #96 welded construction. 16" high Aluminum U.L. Listed Baffle Filters. Pitched grease trough to removable covered Stainless Steel grease cup. Complete with hangerstrap and instructions. NSF Listed, built to NFPA Code #96 and International Mechanical Code requirements for Type I Low Side Wall Hoods. Make Up Air: Untempered Make Up Air introduced in the front of the Ventilator thru adjustable loovers below an insulated plate shelf. 3" NFPA Airspace: Allows Updraft to be placed 3" from drywall on steel studs per NFPA#96. LSW96"A" Series: Painted Model: Same as above except exposed exterior constructed of 18 gauge Aluminized coated Steel, exterior painted hammertone gray where shows.

8132 Puritan Avenue, Detroit, Michigan, 48238, Phone Toll Free - 1-800-521-2895, Fax Toll Free 1-800-444-2895