





CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS



APPROVAL SHEET



Economy Low Side Wall Ventilator 17" Wide With 3" NFPA Air Space

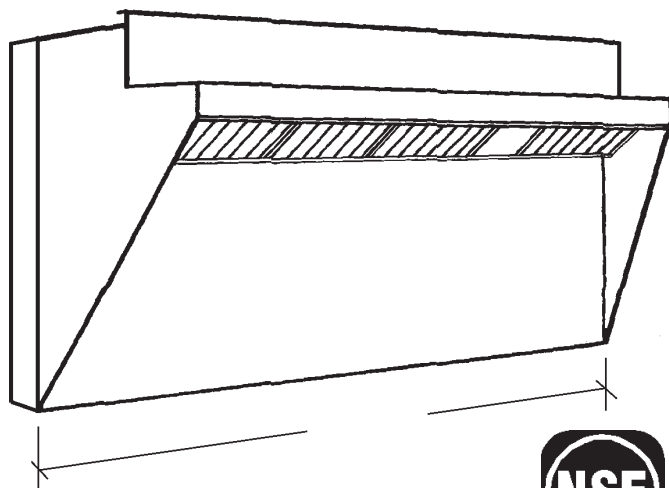

Job Name:		
Dealer:		
Updraft Model	By:	Date:
Fabrication cannot begin until sheet is signed		
Approved by	PO Number	Date


Options



Standard 2



NFPA#96

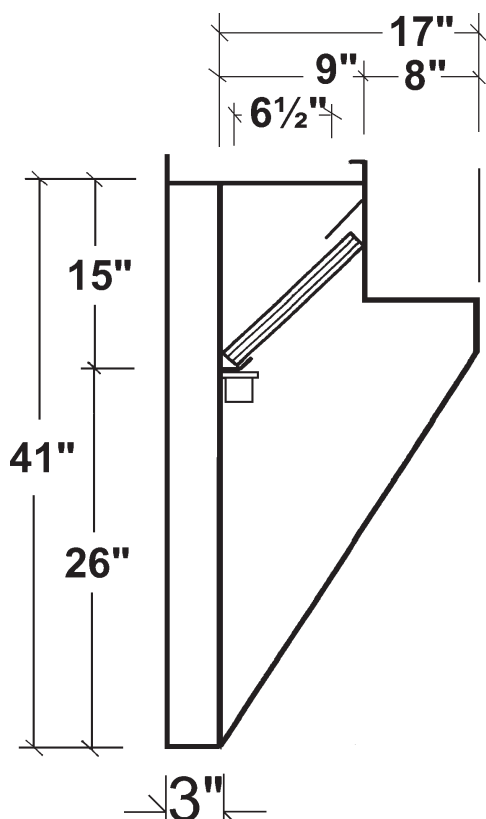

Specifications

- **U96TS Series Ventilators:** Constructed of Stainless Steel on all exposed surfaces. Ventilation Section constructed of 20 Gauge Stainless Steel and 18 Gauge Aluminized Steel. All Seams externally welded, Code #96 construction.
- Stainless Steel Plate Shelf, Back Panel and Top Ends. Includes a full complement of 20" wide U.L. Grease Listed Aluminum Baffle Filters, pitched Grease Gutter, Grease Drain, and removable S/S Covered Grease cup. NSF Listed. Built to NFPA Standard #96, International Mechanical Code Type I Specifications for Low Side Wall Canopies.
- **NFPA 3" Air Space:** 20 Gauge S/S Rear Air Space to allow Updraft to be installed 3" from drywall on steel studs only.
- ☐ **U96TA Series Ventilator:** Same as above only constructed of 18 Gauge Aluminized Steel. Painted Hammertone Gray Exposed Exterior.
- ☐ **UL 710 and Canada CSA C22.2 No 113 Exhaust Hood Recognized**



UL 710



Can CSA C22.2