




CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS

APPROVAL SHEET

Compensating Fan with 19½" Exhaust Curb Motor Powered Roof Mount Untempered Air Supplier for Flat Roof

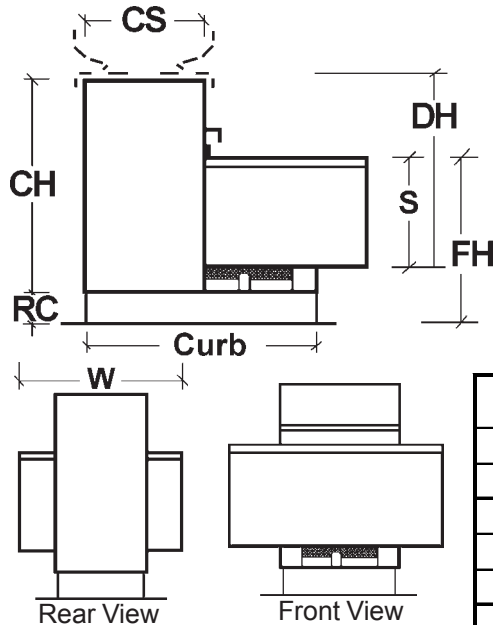

Job Name:		
Dealer:		
Make Up Air Fan Model	SP	CFM
Exhaust Fan Model	SP	CFM
P.O. #	By:	Date
Fabrication cannot begin until sheet is signed		
Approved by		Date

Dimensional Data

Model	Curb	HP	W	CS	RC	CH	FH	DH	S	Filters
FMC_A19½	19½"x50½"	1/6	36"	19½"	6"	39"	33"	28"	16"	(3) 20"x25"
FMC_B19½	19½"x50½"	1/6	36"	19½"	6"	39"	33"	28"	16"	(3) 20"x25"
FMC_C19½	19½"x50½"	1/4	36"	19½"	6"	39"	33"	28"	16"	(3) 20"x25"
FMC_D19½	19½"x50½"	1/2	36"	19½"	6"	39"	33"	28"	16"	(3) 20"x25"
FMC_E19½	19½"x50½"	3/4	36"	19½"	6"	39"	33"	28"	16"	(3) 20"x25"

FMC Series Compensating Fan with 19½" Exhaust Curb


Filtered Motorized Make Up Air Fan constructed of all Aluminized Steel with painted exterior. Fan has (3) UL Listed 1" Thick removable long lasting metal Air Filters. Fan has built in 19½" x 18 Gauge Roof curb for UL Listed Exhaust Fan. Unit gives required 36" clearance between Make Up Air Fan Intake and Exhaust Discharge. Fan supplied with 6" high roof curb for a flat roof. Single Speed Motor. Allows one roof penetration for Exhaust and Make Up Air Fan.

☐ **18½" Sq Exhaust Curb:** Supplied in lieu of 19½" Sq Curb

☐ **12" High Roof Curb:** Supplied in lieu of 6" High Roof Curb

☐ **Two Speed Motor:** Supplied with two speed motor in lieu of one speed.

☐ **Make Up Air Duct:** Consisting of a duct jack that fits the curb and 12" x 15ft flexible metal make up air duct with collars.

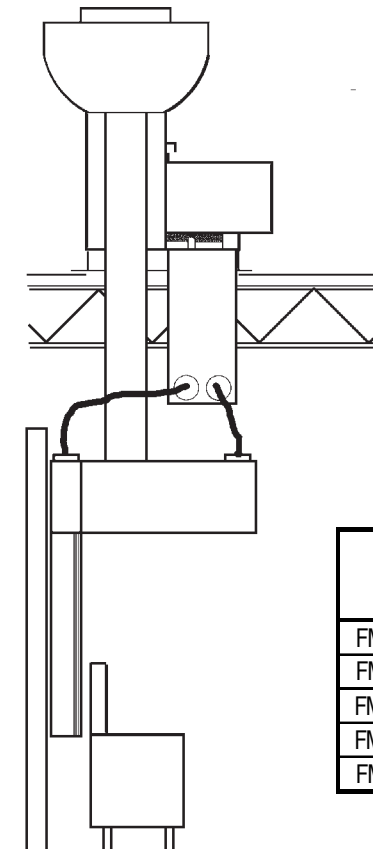

CFM Capacities @

Model	HP	Volt	1/8" SP	1/4" SP	1/2" SP	3/4" SP	1" SP	1½" SP	Model
FMC-A19½	1/6	115/1	1300-500	500-0	0	0	0	0	FMC-A19½
FMC-B19½	1/4	115/1	1550	1500	1350	1125	875	400	FMC-B19½
FMC-C19½	1/3	115/1	1750	1675	1575	1375	1175	750	FMC-C19½
FMC-D19½	1/2	115/1	2000	1925	1875	1725	1525	1175	FMC-D19½
FMC-E19½	3/4	230/1	2300	2250	2150	2100	1950	1675	FMC-E19½

8132 Puritan Avenue, Detroit, Michigan, 48238, Phone Toll Free - 1-800-521-2895.

Fax Toll Free 1-800-444-2895