



CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS



NFPA#96

**APPROVAL
SHEET**




Standard 2

Thrift Air "TB96" Box Style Canopy

With End Curtains

With 3" NFPA Air Space

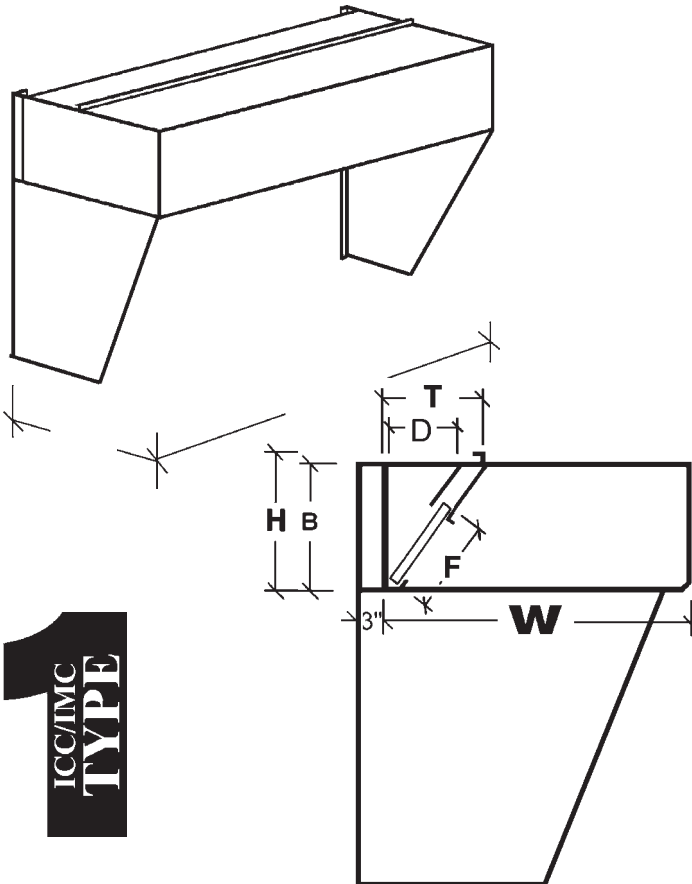

Job Name:		
Dealer:		
Canopy Model	By:	Date:
Fabrication cannot begin until sheet is signed		
Approved by	PO Number	Date

TB AS	DIMENSIONAL DATA					
"W"	"CW"	"B"	"H"	"T"	"F"	D
39"	36	16½"	18"	19"	16"	14"
45"	42	16½"	18"	25"	16"	14"
51"	48	16½"	18"	19"	16"	14"
57"	54	16½"	18"	25"	16"	14"
63"	60	16½"	18"	30"	16"	18"

Specifications

☐ **TB96S0 Series Thrift Air Box Style Exhaust Canopy:** Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction. Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear Grease Gutter, Grease Drain and removable Grease Cup. Front Middle and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA, and International Mechanical Code Type I Hood Standards.

☐ **End Curtains:** Light Gauge S/S End Curtains to improve efficiency and lower required CFM

☐ **Air Space:** NFPA 3" Air Space on (back) (left) (right) for use on fire rated drywall on steel stud walls

☐ **TB96A8 Series Thrift Air Box Style Exhaust Canopy:** Sturdi-Bilt Canopy same as above only constructed of 18 Gauge Aluminized Steel. All Exposed surfaces painted hammertone Gray.

☐ **Vapor Proof Canopy Light:** Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy Light Fixture, Mounting Plate, External Junction Box, not prewired.

☐ **UL 710 & CSA C22.2 No 113. UL 710**
Canopy Labeled and Listed



Can/CSA C22.2



8132 Puritan Avenue, Detroit, Michigan, 48238 - Phone Toll Free - 1-800-521-2895 - Fax Toll Free 1-800-444-2895