




APPROVAL SHEET



Thrift Air T2M96 24" Hi Make Up Air Canopy With 3" NFPA Air Space

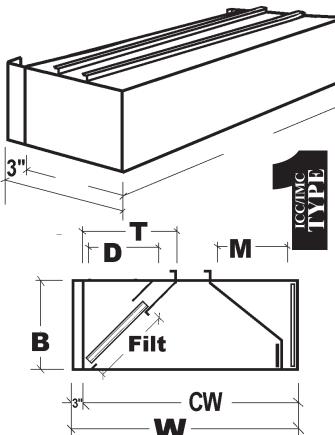

Job Name:		
Dealer:		
Canopy Model	Ву:	Date:
Fabrication cannot	begin until	sheet is signed
Approved by	PO Number	Date

T2M AS	DIMENSIONAL DATA							
W	CW	В	Н	T	D	F	M	
39"	36"	24"	25½"					
45"	42"	24"	25½"					
51"	48"	24"	25½"	18"	16"	20"	12"	
57"	54"	24"	25½"	18"	16"	20"	12"	

Specifications
T2M96S0 Series 24" High Thrift Air Make Up Air Canopy: Sturdi-Bilt Compensating Canopy for air
conditioned kitchens and kitchens with low ceilings constructed of 20 Gauge Stainless Steel #3 polish on all exposed
• surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction. Insulated Make Up Air
Plenum with full length diffusers. Includes a full compliment of 20" wide U.L. Listed Aluminum Baffle Filters, Pitched Rear
• Grease Gutter, Grease Drain and removable Grease Cup. Front and Rear Hanger Brackets. NSF Listed, Built to NFPA #96 and
International Mechanical Code Type 1 Hood Standards.
Air Space: NFPA 3" Air Space on (back) (left) (right) for use on fire rated drywall on steel stud walls
T2M96A8 Series 24" High Thrift Air Make Up Air Exhaust Canopy: Sturdi-Bilt Canopy same as above only
• constructed of 18 Gauge Aluminized Steel. All Exposed surfaces painted hammertone Gray.
Vapor Proof Canopy Light: Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt
Incandescent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe,
Canopy Light Fixture, Mounting Plate, Junction Box, prewired to External Junction Box.
• S/S Wall Paneling: 20 Gauge S/S Wall Paneling with Aluminum Trim" Hi
UL 710 (U _L) LISTED
Canony Labeled and Listed