




APPROVAL SHEET



CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FANS

Thrift Air "T96" Slant Canopy

With End Curtains and Exhaust Plenum

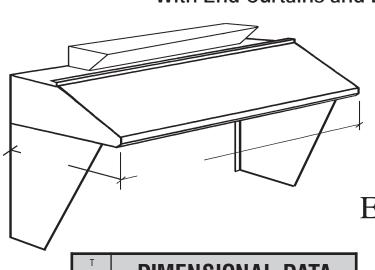

<i>a</i> 1111	
	T
By:	Date:
heain until	sheet is sinned
bogiii uiitii	ancer is signed
PO Number	Date
	By: begin until

Exit Duct Size: ___"x

110 1	<i>-</i> 40	
F E	T + D +	
H B	F	
	`	W
		/



T PLN EC	DIMENSIONAL DATA					
"W"	"H"	"B"	"T"	"F"	"D"	"E"
39"	18"	16½"	14"	12"		
45"	18"	16½"	14"	16"		
51"	18"	161/2"	20"	16"		
57"	18"	16½"	20"	16"		
63"	18"	161/2"	20"	16"		

Canopy Labeled and Listed

T96S0 Series Thrift Air Exhaust Canopy: Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3
 polish on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Con-
• struction. Includes a full compliment of 20" wide U.L. Listed Heavy Duty Galvanized Steel Baffle Filters, Pitched Rear
Grease Gutter, Grease Drain and removable Grease Cup. Front and Rear Hanger Brackets for threaded rod. NSF Listed,
Built to NFPA #96, and International Mechanical Code Type I Standards.
• Exhaust Plenum: Externally welded NFPA#96 16 Gauge Aluminized Steel Plenm with two welded canopy connections
which allows one exhaust duct to serve hood.
End Curtains: Light Gauge S/S End Curtains to improve efficiency and lower required CFM
T96A8 Series Thrift Air Exhaust Canopy: Same only all 18 Gauge Aluminized Steel Painted Gray where exposed. S/S Wall Paneling: 20 Gauge S/S Wall Paneling with Aluminum Trim" Hi
S/S Wall Paneling: 20 Gauge S/S Wall Paneling with Aluminum Trim" Hi
• Vapor Proof Canopy Light: Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incan-
descent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy
Light Fixture Mounting Plate External Junction Roy, not provided

Specifications