






CANOPIES, UPDRAFTS, DUCTWORK, EXHAUST AND MAKE UP AIR FAN

Thrift Air "T96" Slant Canopy

Rear Tempered Make Up Air Wall Paneling, End Curtains, Exhaust Plenum

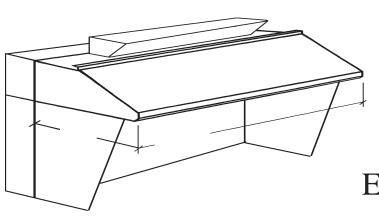


9	, Liid Gartaii	is, Exila	ust i iciiuii
	Job Name:		
	Dealer:		
	Canopy Model	Ву:	Date:
	Fabrication cannot	begin until	sheet is signed
	Approved by	PO Number	Date

Exit Duct Size: __"x

T RMUA PLENUM	DIMENSIONAL DATA							
"W"	"B"	"H"	"T"	"F"	"D"	"E"	"M"	"P"
36"	161/2"	18"	14"	16"				
42"	161/2"	18"	14"	16"				
48"	161/2"	18"	20"	16"				
54"	16½"	18"	20"	16"				
60"	16½"	18"	20"	16"				

Canopy Labeled and Listed





Specifications					
T96S0 Series Thrift Air Exhaust Canopy: Sturdi-Bilt Canopy constructed of 20 Gauge Stainless Steel #3 polish					
on all exposed surfaces. Balance 18 Gauge Aluminized Steel. All Externally Welded Seams, Code #96 Construction.					
Includes a full compliment of 20" wide U.L. Listed Heavy Duty Galvanized Steel Baffle Filters, Pitched Rear Grease Gutter,					
Grease Drain and removable Grease Cup. Front and Rear Hanger Brackets for threaded rod. NSF Listed, Built to NFPA #96,					
and International Mechanical Code Type I Standards.					
Rear Make Up Air Return: Distributes Tempered air behind the canopy in an rear S/S make up air plenum.					
Exhaust Plenum : Externally welded NFPA#96 16 Gauge Aluminized Steel Plenm with two welded canopy connections					
which allows one exhaust duct to serve hood.					
End Curtains: Light Gauge S/S End Curtains to improve efficiency and lower required CFM					
T96A8 Series Thrift Air Exhaust Canopy: Same only all 18 Gauge Aluminized Steel Painted Gray where exposed.					
S/S Wall Paneling: 20 Gauge S/S Wall Paneling with Aluminum Trim" Hi					
Vapor Proof Canopy Light: Sturdi-Bilt Fireguard Canopy Light, U.L. and NSF Listed 100 Watt Incan-					
descent Vapor and Grease proof Canopy Light. Included Plastic Coated Lime Glass Globe, Canopy					
Light Fixture, Mounting Plate, External Junction Box, not prewired.					
UL 710					